



GLOBAL SYSTEMS GROUP
A DIVISION OF LEGGETT & PLATT

800-343-8138

417-237-6254

gsgcompanies.com

info@gsgcompanies.com

FPT-1000 Faux Tape Machine

Automatically sews faux tape seams to borders and simulates the appearance of stylish pillowtop beds with all the costs.

Features & Benefits

- Tape line adjustable from 2" – 8" (50mm – 202mm)
- Adjustable folder for quick faux border height changes
- Eliminates one tape edge operation
- Automatic thread break, tape, and material run-out detection
- Material: Up to 5/16" (8 mm)
- Speed: 4500 rpm @ 6 spi
- Footprint: 54" x 112" (1.3 m x 2.8 m)
- Yield: 62+/- feet/minute

Specifications

Max sewing speed 5,000 RPM

Recommended sewing speed 4,000 RPM

Max border thickness Up to 5/16" thick (8 mm)

Min border thickness Flat

Material Width 18 inches (457 mm)

Stitches per inch 0.5 spi

Yield 62 +/- feet/minute (18.89 m +/- per minute)

Needle type 135X17


Needle size 22

Voltage 220 (alternative voltages available)

Current 10 amps

Air pressure 80 psi

Air consumption 1/2 cfm

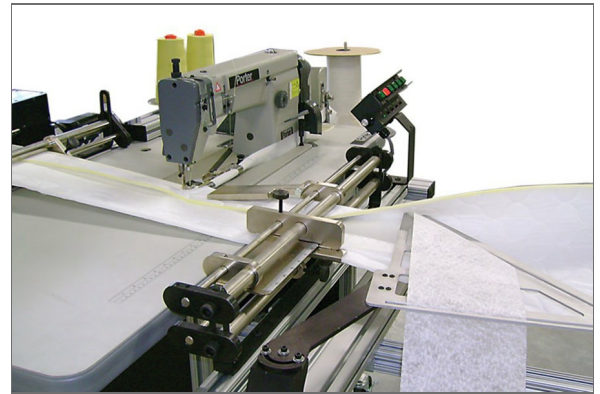

Weight 1220 lbs (553kg)

Shipping dimensions 124 X 57 X 75" (315 X 145 X 190 cm)