



GLOBAL SYSTEMS GROUP
A DIVISION OF LEGGETT & PLATT

800-343-8138

417-237-6254

gsgcompanies.com



info@gsgcompanies.com

GAP 3250 High Speed Flanger for FLAT to 1.50

The GAP 3250 High-Speed Flanger is a high-quality flanger that sews flat panels up to 1.5" thick panels with superior sewing handling and seam quality. It features the fewest moving and spare parts costs and a high-pressure oiling system with dual filters. GAP 3250 is simple to maintain and run, and can sustain a 4500rpm sewing speed.

Features & Benefits

- Sewes flat panels up to 1.5" thick (1" foam + 0.5" fiber)
- Superior sewing handling and seam quality
- Simple to maintain and run
- Fewest moving parts and spare parts costs
- 4500 RPM sewing speed
- High Pressure oiling system with dual filters
- 4-5 stitches per inch
- Patented Power Trac top feed assist
- 3/4" needle spacing
- Flange guide and rear mount flange rack
- Table, stand, thread stand, and clutch motor
- Options:
 - GAP-AT Air floatation table
 - GAP-EC Ergonomic Sewing Chair
 - GAP18143CTI Flange Knife and Inserter
 - Stand up ergonomic table and foot pedal
 - Electronic needle positioning motor
 - VORTECH Jet Waste Removal
- Maintain your machine with quality OEM machine parts and save money doing it! Choose these quality parts kits specifically designed to keep your

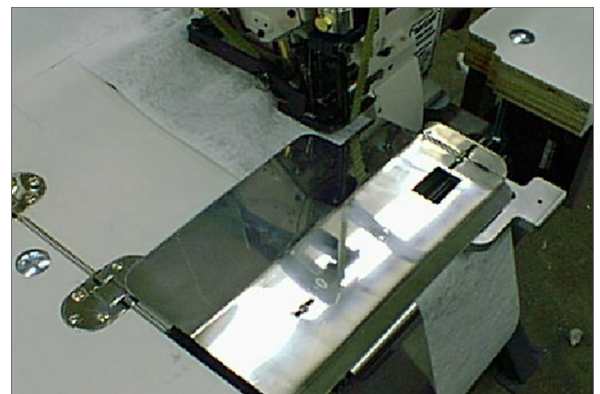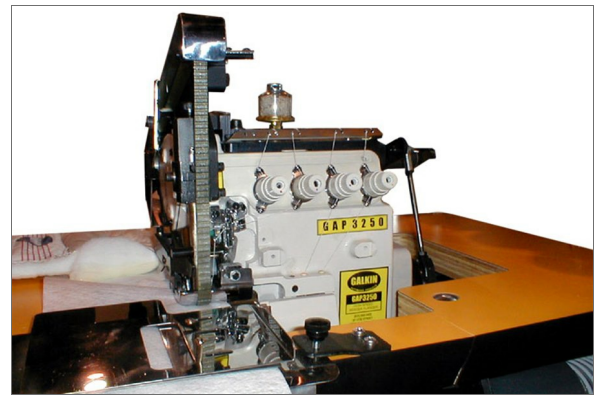

Galkin equipment operating at peak performance.

Specifications

Max Sewing Speed 4500

Recommended Sewing Speed 4200

Max Panel Thickness 2" (50.8 mm)

Min Panel Thickness Flat

SPI 4-5

Seam Width 3/4" (19 mm)

Needle Type 135 x 7

Needle Size 22

Yield 850+/-panels/8 hour shift

Voltage 220 V

Current 5 amps

Air Pressure 80 psi

Air Consumption (cfm) 2 cfm

Shipping Weight 390 lbs. (177 kg)

Shipping Dimensions 59" x 34" x 51" (150 x 86 x 130 cm)