



GLOBAL SYSTEMS GROUP
A DIVISION OF LEGGETT & PLATT

800-343-8138

417-237-6254

gsgcompanies.com

info@gsgcompanies.com

PBS-700 Blindstitch Machine

The PBS-700 Blindstitch Machine features a unique three-point puller system and does a quality job of attaching a gusset to a panel. It includes top and bottom pullers located to the left of the needle and a puller directly behind the feed mechanism.

Features & Benefits

- Attaches gusset to panel
- Unique three-point puller system
- Top and bottom pullers located left of the needle
- Puller located directly behind the feed mechanism
- Electronic needle positioning
- Material: 3/8" – 6" (9.5 mm – 152 mm)
- Speed: 2100 rpm @ 4 spi
- Footprint: 48" x 20" (1.2 m x .5 m)
- Presser foot height: 3/4" (19 mm)

Specifications

Stitch Type 1 thread blindstitch

Max Speed-rpm 2300

Recommended Speed-rpm 2100



Needle Type 251

Needle Size 5 1/2

Presser Foot Height 3/4" (19 mm)

Auxiliary Feeding Device 3 point puller device

Motor Type Servo needle positioner

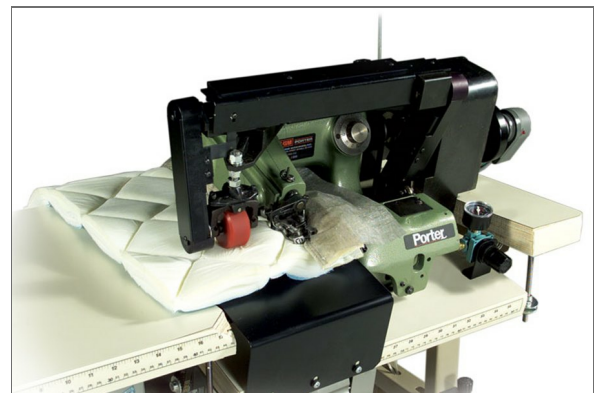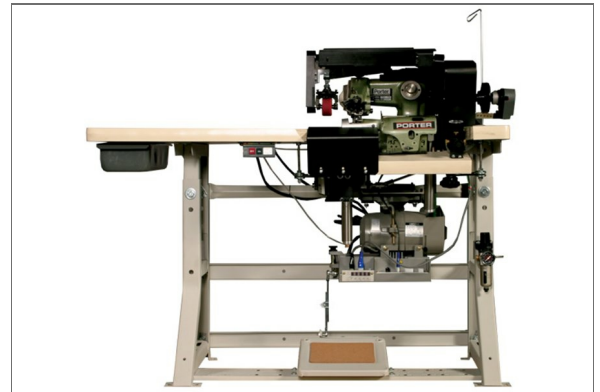

Max. Thickness Capacity 3/8"- 6 " (9.5 mm -152 mm)

Current 5 amps

Air Pressure 80 psi

Air Consumption (cfm) 2 cfm

Weight (gross) 390 lbs. / 177 kg

Shipping Dimensions 59" x 34" x 51" /150 x 86 x 130 cm