



GLOBAL SYSTEMS GROUP
A DIVISION OF LEGGETT & PLATT

800-343-8138

417-237-6254

gsgcompanies.com

info@gsgcompanies.com

PC-6 Panel Cutter

The PC-6 is a proven panel cutter that can be used for plain-goods cutting on most quilted panels. This versatile machine can be configured with optional equipment to handle nearly all panel-cutting needs.

Features & Benefits

- Electronic length measuring with +/- 0.125" (3 mm) cutting repeatability
- Batch counter stops machine when predetermined number of panels have been cut
- Capable of cutting plain or quilted fabrics up to 1.25" (32 mm) quilt standard
- Special feature available for cutting quilted fabric up to 3" (76 mm) thick

Specifications

Max Feed Speed 90 feet (27 mm) per minute

Max Material Thickness 1¼ (32 mm) (optional high-lift kit available for quilted fabric up to 3")

Min Material Thickness Flat

Max Material Width 90" (230 cm) (wider units available)

Accuracy ± 1/8" (3 mm) (for most fabrics and quilts)


Voltage Any 3-phase

Current 208-240V = 25 amps; 380V = 15 amps; 440-480V = 10 amps

Air Pressure 90 psi

Air Consumption 10 cfm (6 bars)

Weight 4,025 lbs (1,830 kg)

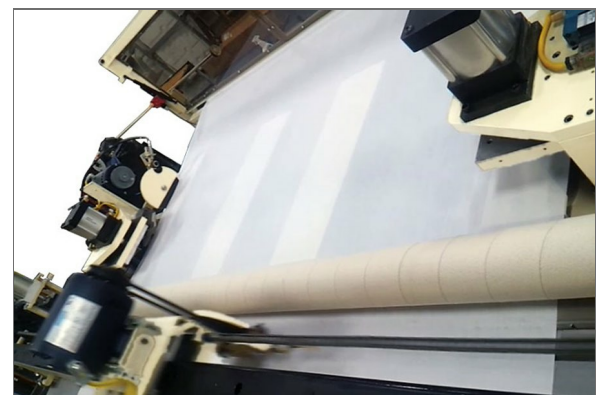

Shipping 143" L x 84" H x 70" W (363 cm x 231 cm x 188 cm)
Dimensions