



GLOBAL SYSTEMS GROUP
A DIVISION OF LEGGETT & PLATT

800-343-8138

417-237-6254

gsgcompanies.com

info@gsgcompanies.com

VBM Vertical Stitch Machine

With an output of up to 11 meters per min on its "V" stitch mode and 2.5meters per min on a castellation pattern of 200mm x 50mm it has the highest output of any machine of its type.

Fully programmable to vary castle pattern length, width and pattern repeats also make it the most versatile on the market.

Features & Benefits

- Maximum material width 300mm
- Minimum material width 120mm
- Material run out stops
- Thread break detectors
- Large capacity rewind (1 meter diameter)
- Hemming folder

Specifications

Speed - Max rpm 3000 SPM

Maximum Material Width 10" (250mm) on standard machine can be extended up to 18" (460mm)


Minimum Material Width 6.3" (160mm)

Maximum Material Thickness 1.2" (30mm) foam or 10.5oz (300gm) of polyester

Stitch Length 4-10 spi (2.5-6.5mm)

Recommended Stitch Length 7 spi (3.5mm)

Needle Size Sytem UY 128 GAS size 150

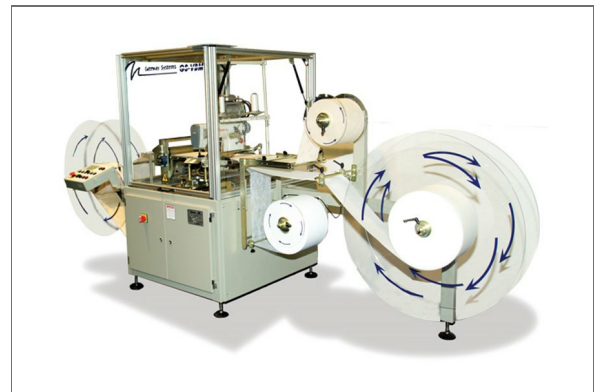

Air Pressure (psi/bar) 90 psi (6bar)

Air Consumption (CFM) 0.5 cfm

Current (amps) 12 amps

Voltage 80 volts 3 ph 50 Hz (220 volts 3ph 50Hz option).

CE Approved Yes

Shipping Weight 650 kg