



GLOBAL SYSTEMS GROUP
A DIVISION OF LEGGETT & PLATT

800-343-8138

417-237-6254

gsgcompanies.com

info@gsgcompanies.com

Wrapper

The Wrapper accepts mixed product length, width and thickness, and in any sequence, resulting in increased productivity and efficiency. This state-of-the-art machine automatically wraps mattresses or foundations in a single work station.

Features & Benefits

- Ergonomically designed bottom film load system
- Mechanical cross cut
- Adjustable platen provides film savings and tight, secure package
- Deluxe guarding includes clear panel and doors
- Continuous heat seal bars
- Compact design minimizes floor space
- Movable pedestal control console can be positioned on either side of machine

Specifications

Max width of infeed 84"

Min width of infeed 24"

Max height under pressure roller 16" and 20"


Roll capacity, top and bottom 4 - top / 1 - bottom

Infeed/outfeed conveyor height 34"

Overall height 86", not including film

Max film width 122" (3.1 m)

Upper film maximum width 118" (3.1 m)

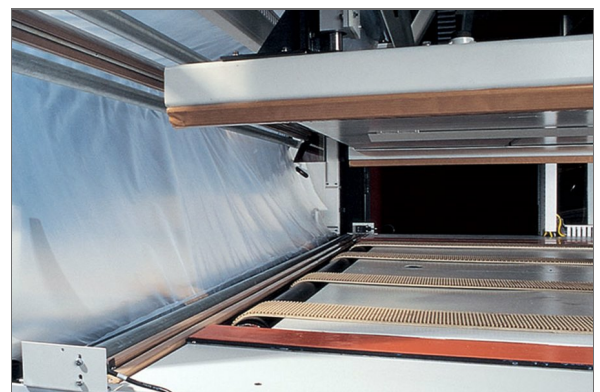

Lower film maximum width 112" (2.84 m)

Upper boot film 20" minimum (5.08 m)

Lower boot Film 16" minimum (5.06 m)

Voltage (v/ph/hz) Any 3-phase voltage (includes multi-tap transformer)

Current (amps) 20, 25, or 30 depending on voltage

Air consumption (cfm) 3.2

Air pressure (psi) 80 to 95 (5.5-6.5 bars)

Total shipping weight 7,700 lbs (3,493 kg)

Production Up to 4 units/minute