



GLOBAL SYSTEMS GROUP
A DIVISION OF LEGGETT & PLATT

800-343-8138

417-237-6254

gsgcompanies.com

info@gsgcompanies.com

PTS-515-SS Gusset/Winder Machine

The PTS-515-SS is a gusset/winder machine with an automatic winder and integral top and bottom puller. It features automatic thread break detection and accepts most standard and offset gusset styles.

Features & Benefits

- Automatic winder
- Integral top and bottom puller
- Automatic thread-break detection
- Material: Most standard and offset gusset styles
- Speed: 3,400 rpm @ 5 spi
- Footprint: 34" x 99" (.86 m x 2.5 m)

Specifications

Stitch Type Overlock with safety stitch

Std Folder 5" (12.7 cm) wide V gusset but up to 8 1/2" (216 mm)

Max Speed-rpm 4000

Recommended Speed-rpm 3400

Stitches Per Inch 5

Needle Type DC x 27


Needle Size 21

Needle Height 11 mm

Presser Foot Height 8 mm

Aux Feed Device Integral puller-top and bottom drive

Motor Type Electronic needle postioner

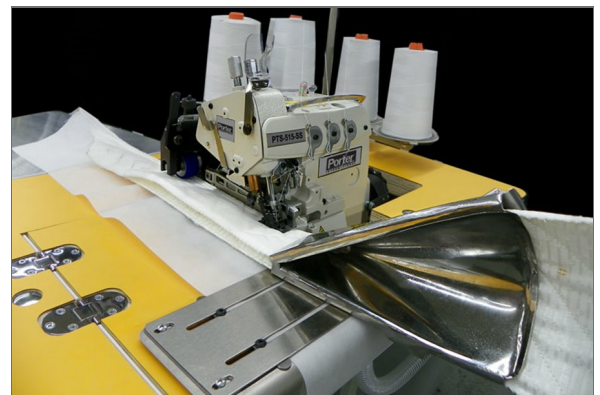

Max. Thickness Capacity 6mm/quilted pkg

Voltage 220VAC

Current 5 amps

Air Pressure 80 psi

Air Consumption (cfm) 0.5 CFM

Weight (gross) 1099 LBS (498 kg)

Shipping Dimensions 99" x 51" x 79" (2.5 x 0.86 x 2 m)

Footprint 108" x 34" (2.7 x 0.86 m)